

TRUFAST SCREWS @ 24" O.C.
W/ MINIMUM 1" PENETRATION
INTO TOP PLATE MATERIAL
(U.N.O.)

TRUFAST SCREWS @ 24" O.C.
W/ MINIMUM 1" PENETRATION
INTO TIMBER FRAME (U.N.O.)


SQUARE-CUT EAVE

BEVELED TOP PLATE

$\frac{5}{8}$ " SPACER BETWEEN PANELS
AND TIMBER FRAME MEMBER
WHEN $\frac{1}{2}$ " GYPSUM BOARD ON
PANELS (USE $\frac{3}{4}$ " SPACER
WHEN $\frac{5}{8}$ " GYPSUM BOARD ON
PANELS)

TIMBER FRAME MEMBER

GYPSUM BOARD PER CODE
REQUIREMENTS

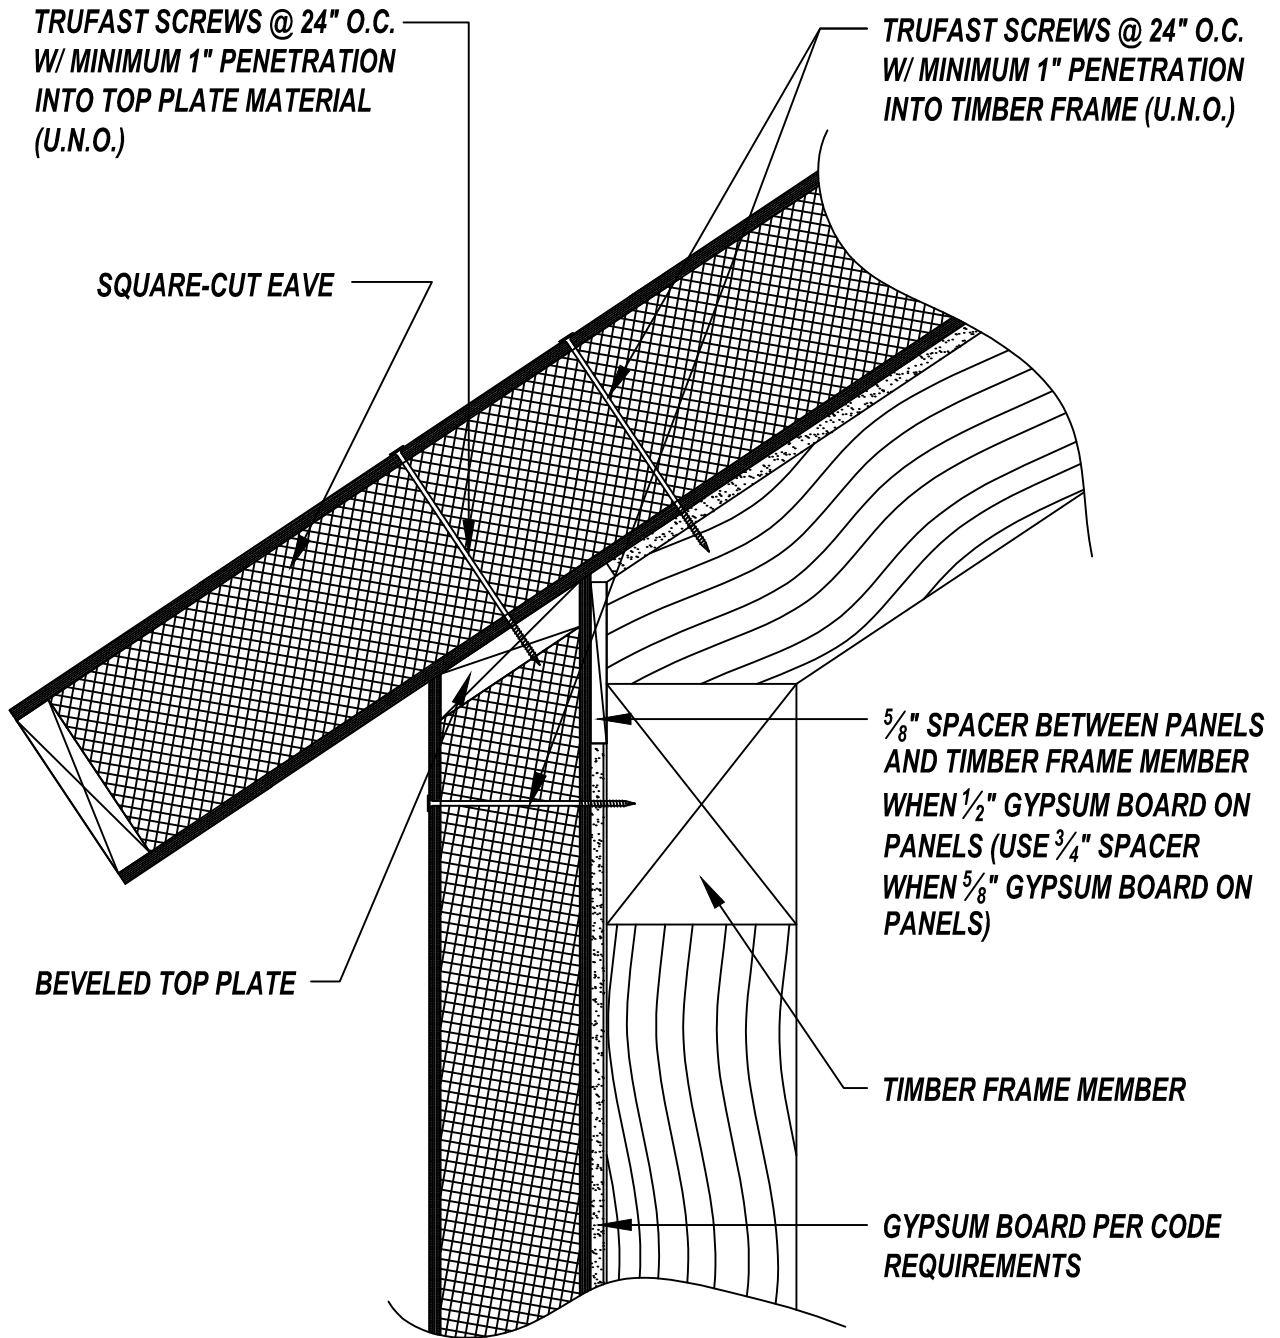

TIMBER FRAME MEMBER CONNECTION

DETAIL NUMBER:

1115

SCALE : NTS

Updated: 3/17/2017

LAMIT INDUSTRIES

STRUCTURAL INSULATED PANELS
FOR THE BUILDING INDUSTRY