


NOTES:

1. FACTORY PROVIDED HORIZONTAL ELECTRICAL CHASES ARE STANDARD 16" AND 45" ABOVE BOTTOM OF PANEL AND ROUGHLY 48" O.C. VERTICALLY UNLESS PRIOR ARRANGEMENTS HAVE BEEN MADE BEFORE PANEL MANUFACTURING.
2. PANEL INSTALLER SHOULD FIELD DRILL AND MARK EVERY ELECTRICAL CHASE ON SUB-FLOOR.
3. FOLLOW LOCAL CODE REQUIREMENTS FOR ELECTRICAL INSTALLATION.
4. ALL PENETRATIONS ARE REQUIRED TO BE FOAMED IN PLACE AFTER ELECTRICAL ROUGH IN IS DONE.

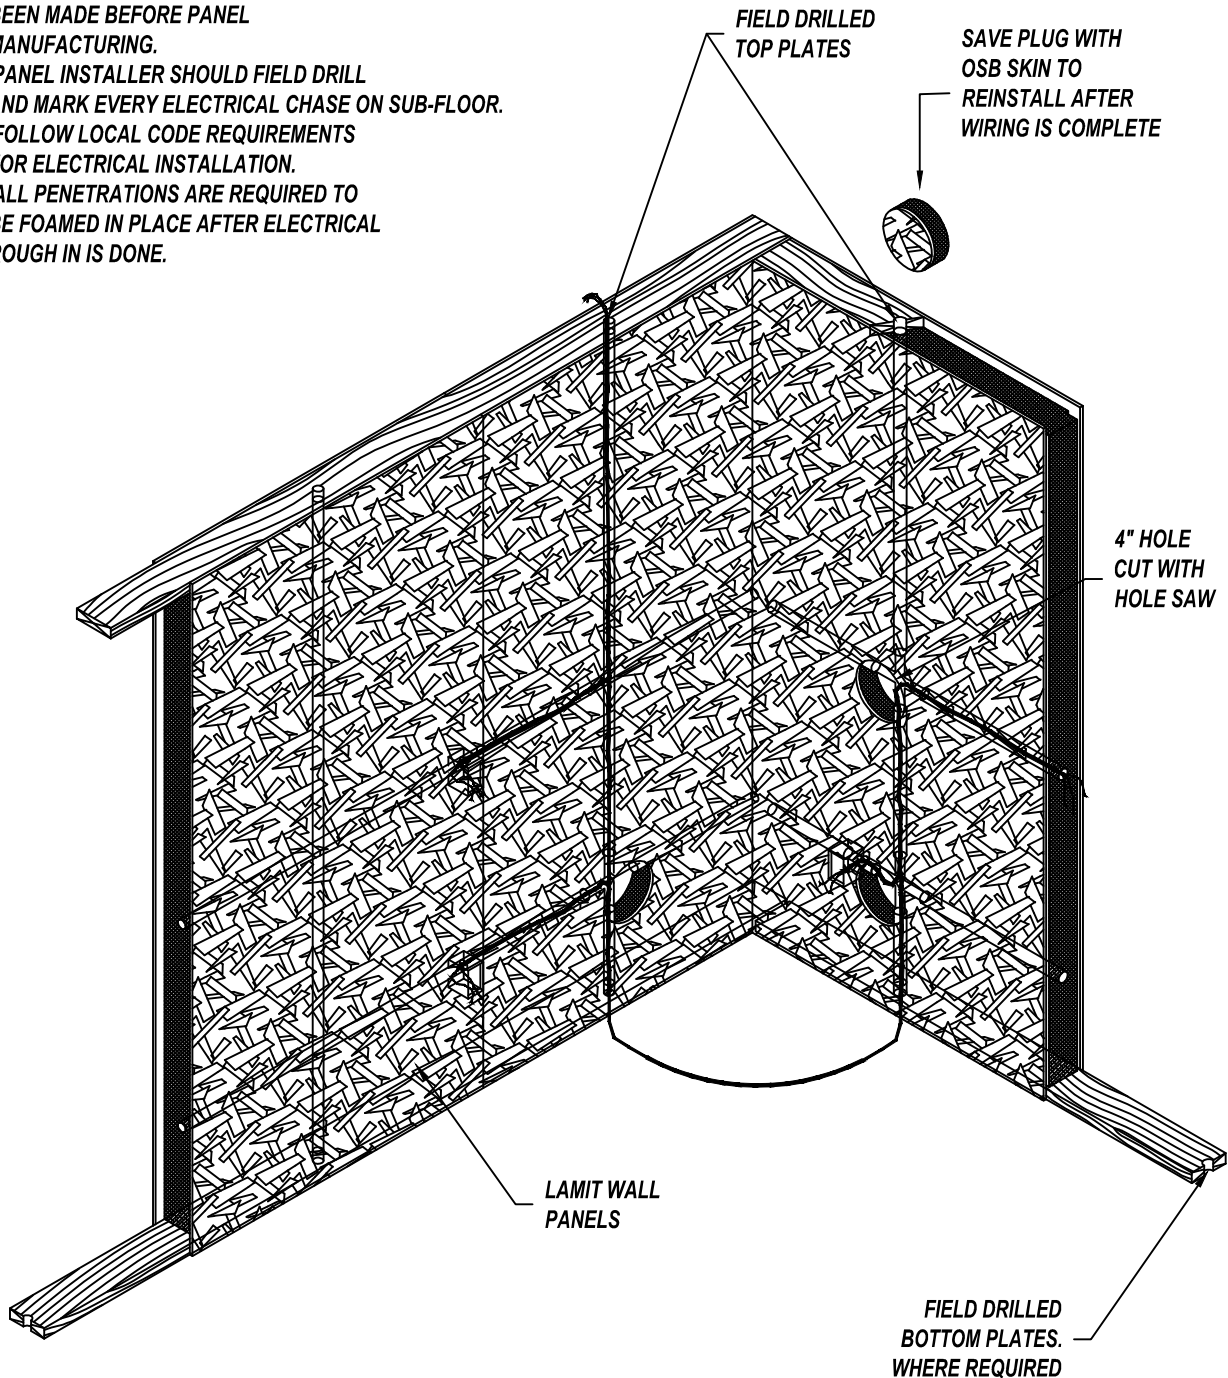

HOW TO RUN WIRE

DETAIL NUMBER:

1305

SCALE : NTS

Updated: 2/22/2017

LAMIT INDUSTRIES

**STRUCTURAL INSULATED PANELS
FOR THE BUILDING INDUSTRY**